

DirectTex® Spinnaker Economy

Fields of application

.02 .04 .06 .07

Specifications



501065 119



100 % polyester
weave fabrics
PVC-free, recyclable



ca. 155/ 310 /505 cm
ca. 61/ 122/ 199 inch
other widths available on request



B-s1, d0 DIN EN 13501-1
M1 NF P 92 503 - 507



ca. 65 g/m²
ca. 1.9 oz/yd²



ca. 0.13 mm
ca. 130 µm



rolls
50/ 100 m
55/ 109 yd



blank: 5
DIN EN ISO 105-B02



100 Pa: 73 l/(m²s)
200 Pa: 125 l/(m²s)
DIN EN ISO 9237



length: 582 N (18.5 N)
cross: 652 N (21.7 N)
DIN EN ISO 13934-1 (13937-2)



length: 25.0 %
cross: 33.1 %
DIN EN ISO 13934-1



UV stable



heat, ultrasonic cut


Printing methods

print	UV	Latex	Dyesub	UVgel
Inside	•	•	•	
Outside	•	•	•	

Article shrinkage (50 sec hold up time)

	shrinkage in cross direction	shrinkage in longitudinal direction	recommended fixing temperature
180°C	1,7 %	2,6 %	•
190°C	1,3 %	3,3 %	
200°C	1,3 %	4,8 %	
210°C	1,4 %	6,5 %	


Certifications



DirectTex® Spinnaker Economy

Fields of application

.02 .04 .06 .07

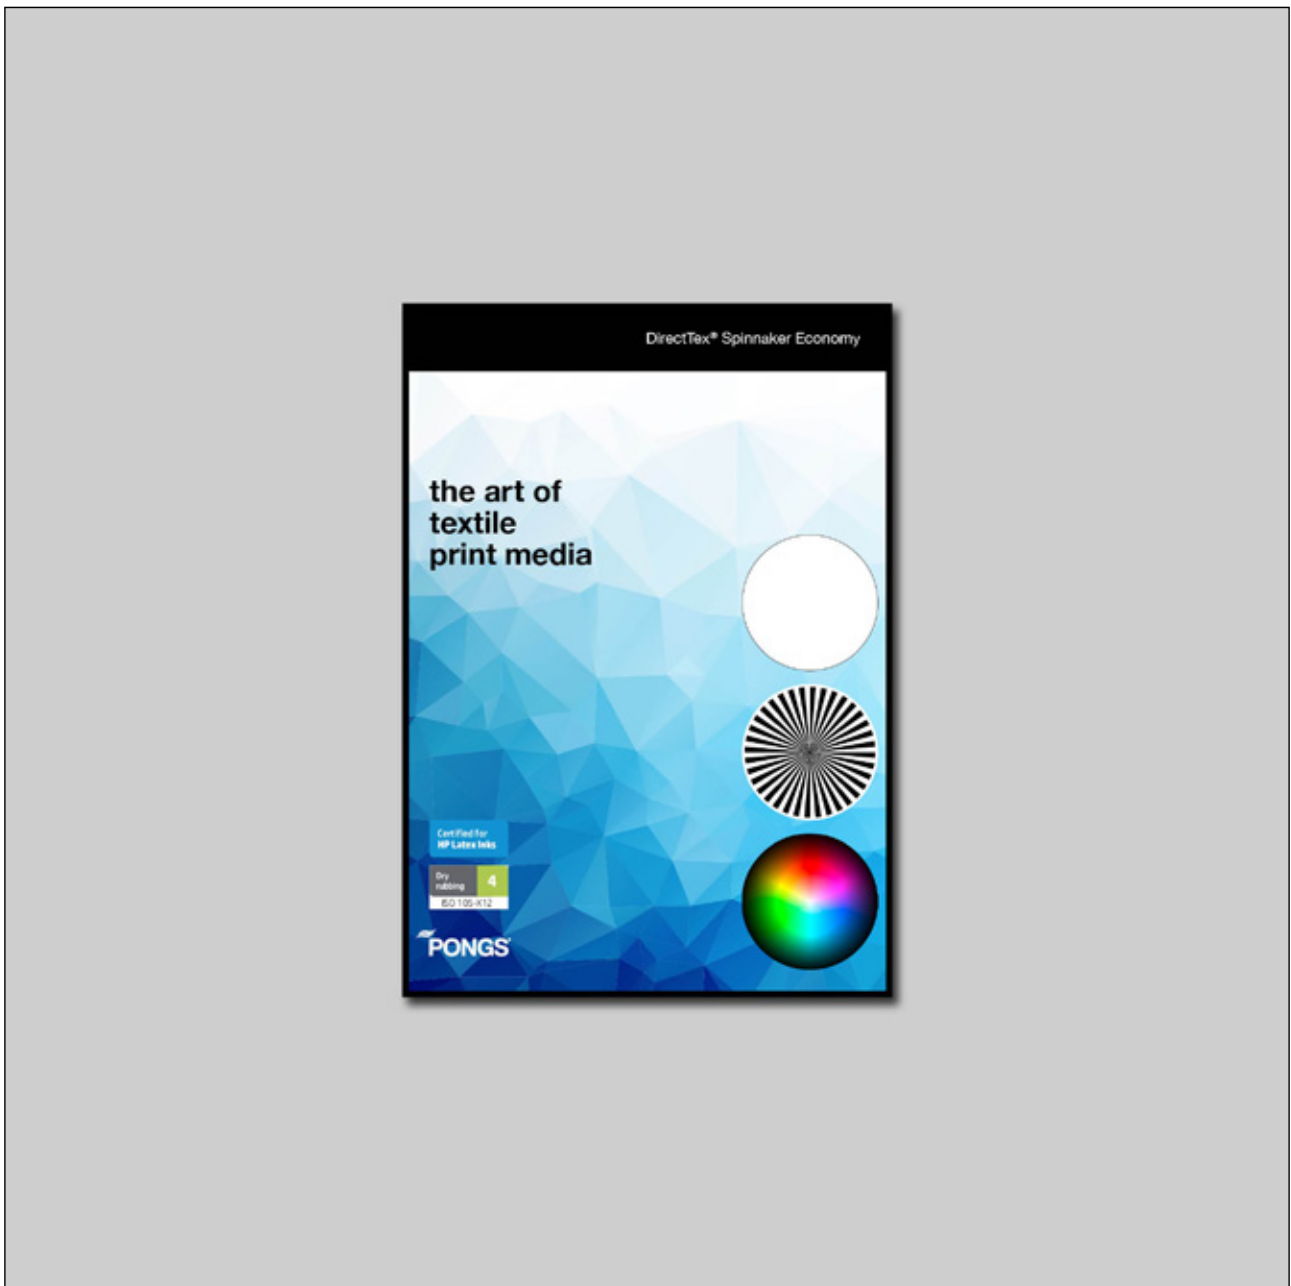

Ref.-Nr.: 501065 119 | Preview print sample