

DirectTex®

PES Theatre Soft

Fields of application

.02 .04 .05 .06 .07

Specifications



550290 120



100 % polyester
weaves fabrics
PVC-free, recyclable



ca. 310/ 505 cm
ca. 122/ 199 inch
other widths available on request



B-s1, d0 DIN EN 13501-1
M1 NF P 92 503 - 507
NFPA 701



ca. 315 g/m²
ca. 9.3 oz/yd²



ca. 0.55 mm
ca. 550 µm



rolls
50 m
55 yd



blank: 8
DIN EN ISO 105-B02



ultrasonic cut

Printing methods

print	UV	Latex	Dyesub
Inside	•	•	•
Outside	•	•	•

Article shrinkage (50 sec hold up time)

	shrinkage in cross direction	shrinkage in longitudinal direction	recommended fixing temperature
180°C	1,1 %	2,1 %	•
190°C	2,1 %	2,3 %	
200°C	2,4 %	3,3 %	
210°C	2,6 %	5,8 %	

Certifications






DirectTex® PES Theatre Soft

Fields of application

.02 .04 .05 .06 .07

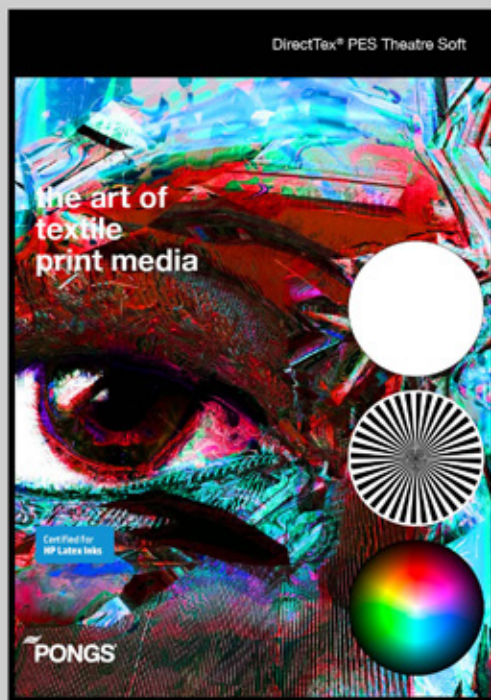

Ref.-Nr.: 550290 120 | Preview print sample



PONGS Technical Textiles GmbH

Bahnhofstraße 21
07919 Pausa-Mühltrorf
Germany

Phone +49 36645 350-0
salestt@pongs.de
www.pongs.com

Find the latest version by scanning the QR code.
We reserve the right for technical modifications.
The above mentioned details are non-binding.
A tolerance of $\pm 5\%$ is valid. Effective: 2021/02