

DirectTex® Artist Canvas

Fields of application

.02 .04 .05 .06 .07

Specifications



550320 009



100 % polyester
weave fabrics
PVC-free, recyclable



ca. 155/ 310/ 505 cm
ca. 61/ 122/ 199 inch
other widths available on request



B-s1, d0 DIN EN 13501-1



ca. 345 g/m²
ca. 10.2 oz/yd²



ca. 0.62 mm
ca. 620 µm



rolls
50 m
55 yd



ultrasonic cut

Printing methods

print	UV	Latex	Dyesub
Inside	•		•
Outside	•		•

Article shrinkage (50 sec hold up time)

	shrinkage in cross direction	shrinkage in longitudinal direction	recommended fixing temperature
180°C	1,0 %	0,4 %	•
190°C	1,2 %	0,6 %	
200°C	1,4 %	0,8 %	
210°C	1,7 %	1,0 %	


Certifications



DirectTex® Artist Canvas

Fields of application

.02 .04 .05 .06 .07

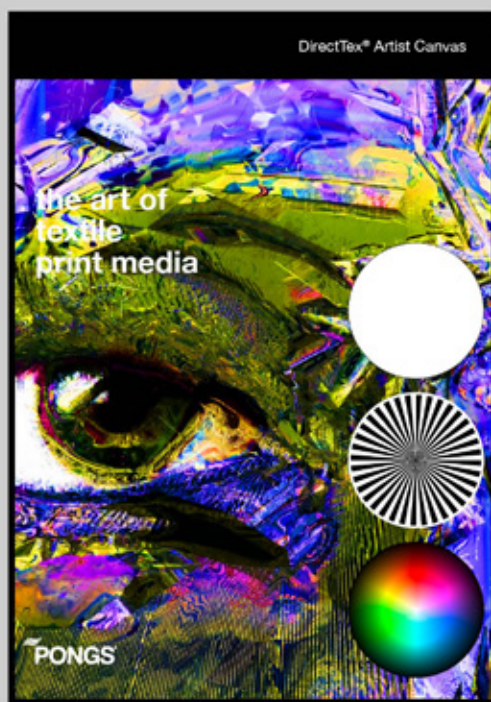

Ref.-Nr.: 550320 009 | Preview print sample