

DirectTex[®] Artist Mambo[®]

Fields of application

.02 .04 .05 .07

Specifications



564160 137



100 % polyester
weave fabrics
PVC-free, recyclable



ca. 160/ 252/ 320/ 505 cm
ca. 63/ 99/ 126/ 199 inch
other widths available on request



B-s1, d0 DIN EN 13501-1
NFPA 701



ca. 170 g/m²
ca. 5.0 oz/yd²



ca. 0.25 mm
ca. 250 μm



rolls
50/ 100 m
55/ 109 yd



coated side: 7
uncoated side: 6-7
DIN EN ISO 105-B02



warp: 1314.1 N
weft: 1238.6 N
DIN EN ISO 13934-1



warp: 27.9 %
weft: 32.6 %
DIN EN ISO 13934-1



warp: 0.8 %
weft: 1.6 %
DIN EN 14704-1



cold, heat, ultrasonic cut



direct light

Printing methods

| print | UV | Latex | Dyesub |
|---------|----|-------|--------|
| Inside | • | | |
| Outside | | | • |

Article shrinkage (50 sec hold up time)

| | shrinkage in cross direction | shrinkage in longitudinal direction | recommended fixing temperature |
|-------|---------------------------------|--|-----------------------------------|
| 180°C | 0,7 % | 1,5 % | • |
| 190°C | 0,8 % | 1,8 % | |
| 200°C | 1,2 % | 2,7 % | |
| 210°C | 1,3 % | 2,8 % | |


Certifications



DirectTex® Artist Mambo

Fields of application

.02 .04 .05 .07

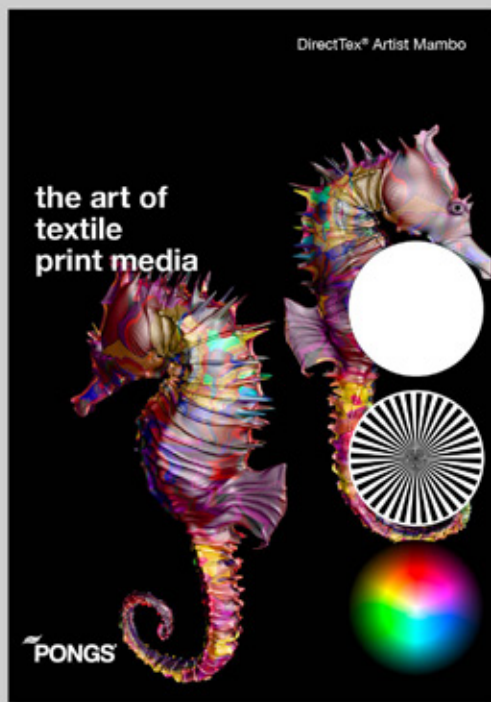

Ref.-Nr.: 564160 137 | Preview print sample