

# DirectTex® Poplin Plus

Fields of application

**.02 .04 .05 .07**

## Specifications



599200 129



100 % polyester  
knit fabrics  
PVC-free, recyclable



ca. 252/ 320/ 505 cm  
ca. 99/ 126/ 199 inch  
other widths available on request



B-s1, d0    DIN EN 13501-1  
M1            NF P 92 503 - 507



ca. 175 g/m<sup>2</sup>  
ca. 5.2 oz/yd<sup>2</sup>



ca. 0.39 mm  
ca. 390 µm



rolls  
50/ 100 m  
55/ 109 yd



cold, heat, ultrasonic cut

## Printing methods

print	UV	Latex	Dyesub
Inside	•		•
Outside			

## Article shrinkage (50 sec hold up time)

	shrinkage in cross direction	shrinkage in longitudinal direction	recommended fixing temperature
180°C	0,4-0,5 %	1,5 %	
190°C	/ %	/ %	
200°C	/ %	/ %	•
210°C	0,8-1,0 %	4,1 %	


## Certifications



## DirectTex® Poplin Plus

Fields of application

**.02 .04 .05 .07**

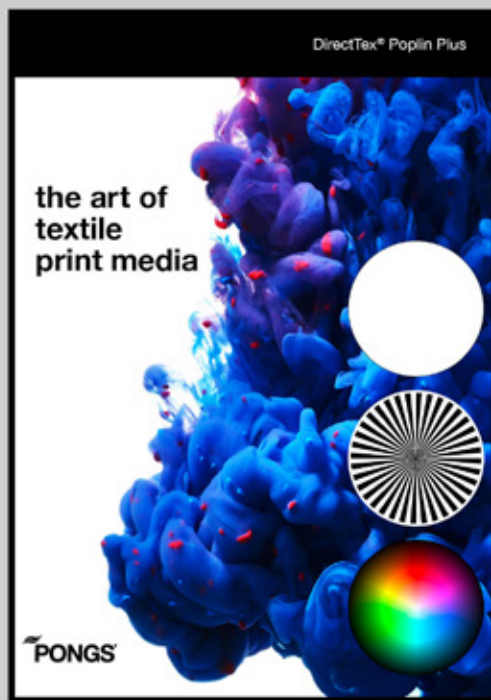

Ref.-Nr.: 599200 129 | Preview print sample