










PrintTex® Shape

Fields of application

.02 .06 .07 .08

Specifications

- 
REF. 983200 009
- 
 50 % polyester 50 % stainless steel
weave fabrics
PVC-free, recyclable
- 
 ca. 320 cm
ca. 126 inch
other widths available on request
- 
 B-s2, d0 DIN EN 13501-1
NFPA 701
- 
 ca. 200 g/m²
ca. 5.9 oz/yd²
- 
 ca. 0.27 mm
ca. 270 µm
- 
 rolls
25 m
27 yd
- 
Specs repeatedly malleable
light diffusive and reflective properties
EMV compliant
- 
 cold cut

Printing methods

print	UV	Latex	Dyesub
Inside	•		
Outside	•		


Certifications



PrintTex® Shape

Fields of application

.02 .06 .07 .08

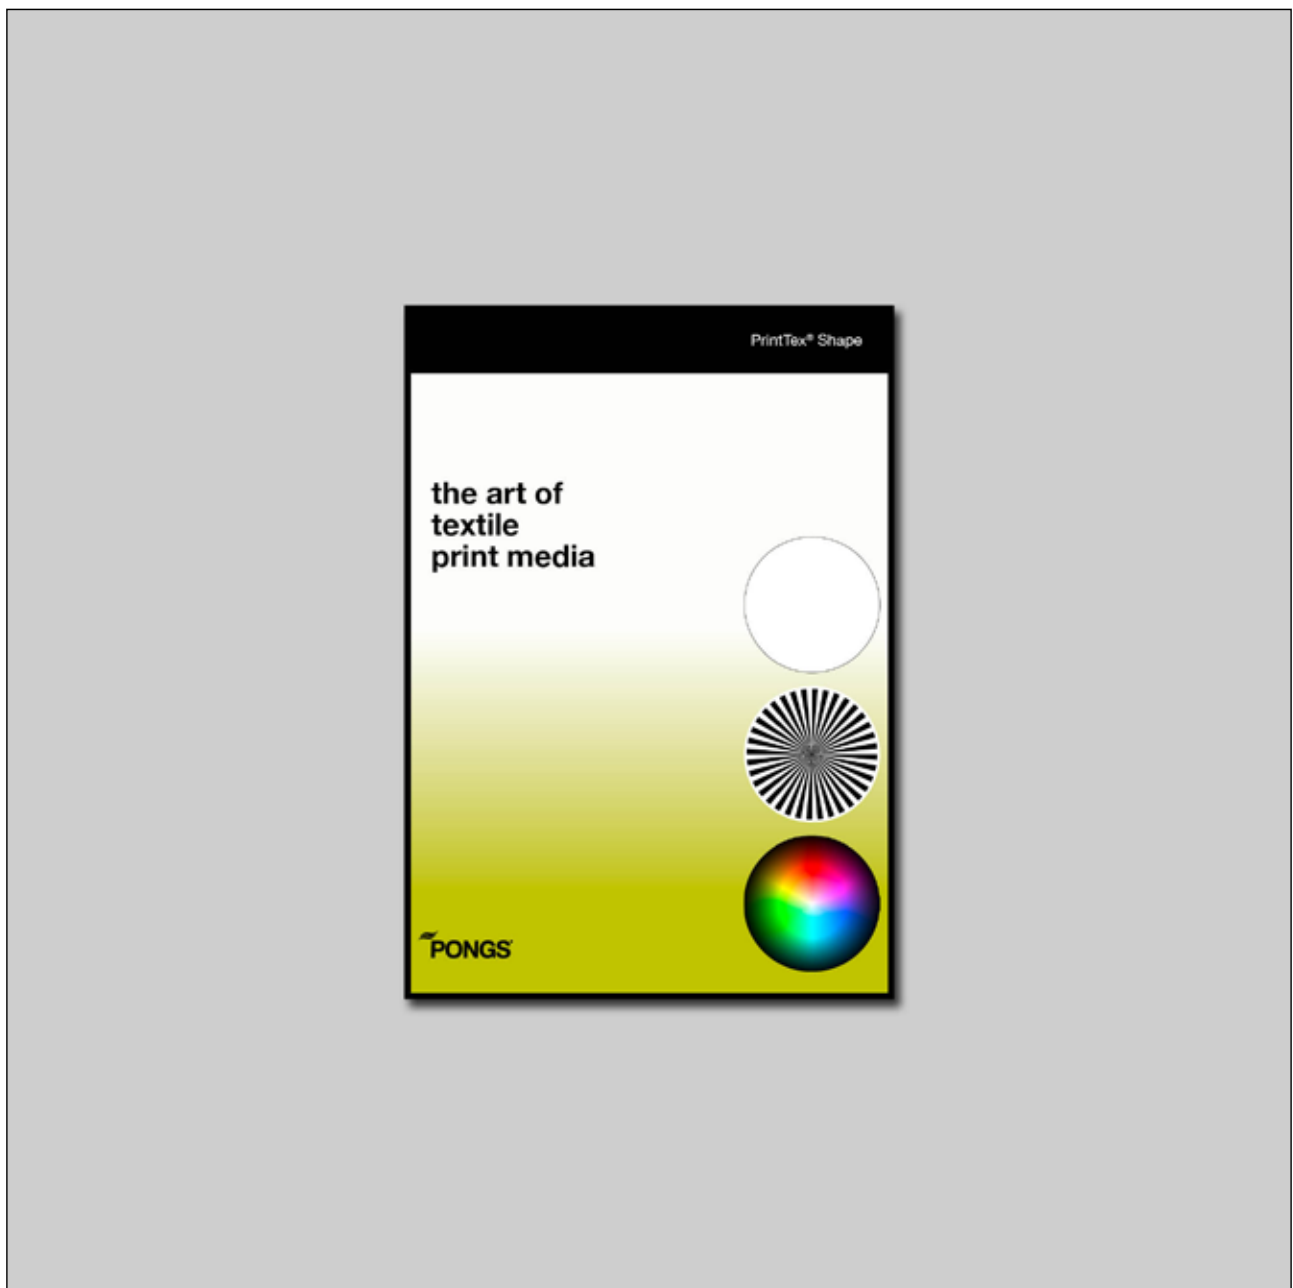

Ref.-Nr.: 983200 009 | Preview print sample